Electrical

Frequency	0-67 GHz				
VSWR	1.30 Max				
Impedance	50 Ohms				
Power Handling	2 Watt Average @ 25°C				
	Derated Linearly to 0.5 Watts @ 125°C				


Mechanical


1.85 Interface per	IEEE P287				
Operating Temperature	-55°C to +125°C				


Materials

Description	Material	Finish Passivated			
Body	Stainless Steel				
Contacts	Brass	Au 50µ" Min Plated			



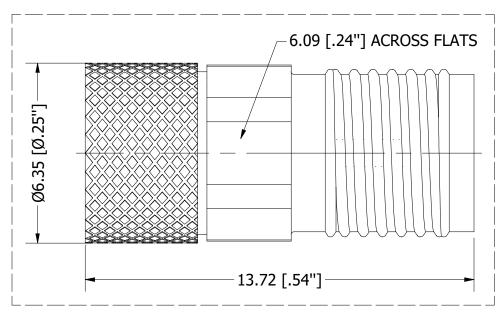

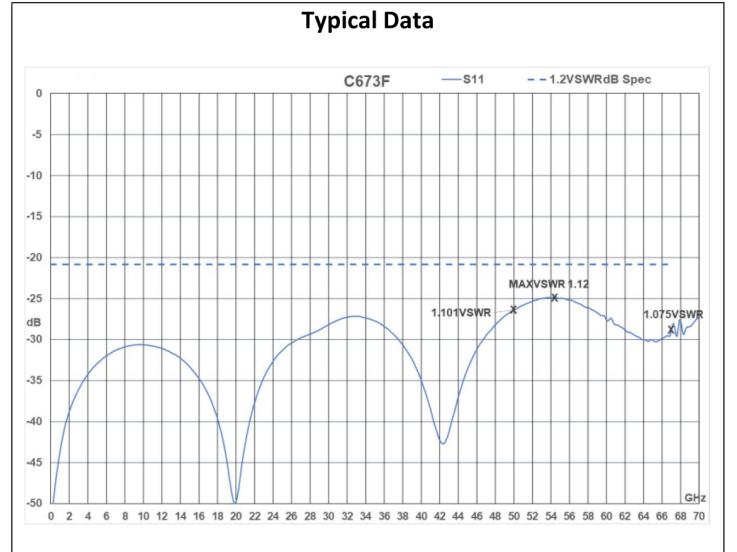

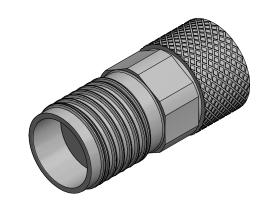

В

Customer P/N: MLT-185FST-2

REV

A01

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES		CIFIED	multiLane					
	TOLERANCES: $x.x \pm 0.1$ $x.xx \pm 0.05$ Rad ± 0.1 Dia ± 0.1			TITLE					
				RF C	RF Coaxial Terminator, 1.85mm (F)				
				50 Ohm, 2 Watt, 67 GHz					
	Ang ± 0.1°						acc, 0, 0.12		
PROPRIETARY AND CONFIDENTIAL	MATERIAL:	N/A							
THE INFORMATION CONTAINED IN THIS	ETNITCI I.	N1/A		SIZE	QTY		PART NO		
DRAWING IS THE SOLE PROPERTY OF	FINISH:	N/A		В			142-7089-001		
MULTILANE. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT THE WRITTEN		CEOMETRIC 1	TOLERANCING				172-7009-001		
PERMISSION OF MULTILANE IS PROHIBITED	PER: ASME		OLLIVAINCING	SCALE	7.5			SHEET 1 OF 1	
Λ	I LIX. ASI'IL	111.5 2005	2		,			4	