


MLCBMS-K-XX(m/f) TYPE A

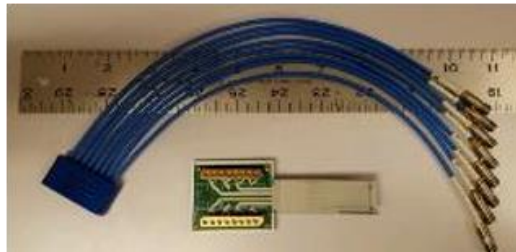

Attribute	Specification
Description	1x8 MSMPM to K (m/f) cable, type A
Frequency Range	DC – 40 GHz
Impedance	50 Ω
Return Loss	-15.0 dB (Max)
Typical Insertion Loss/1m @50GHz	-3.3 dB
Velocity of Propagation	70% (Nominal)

Attribute	Value
Length of cable	XX cm
Nominal Outer Diameter of Cable	1.42 mm
Minimum Bend Radius Static	5 mm
Temperature Range	-65°C – 165°C

North America

48521 Warm Springs Blvd. Suite 310
Fremont, CA 94539
USA
+1 510 573 6388

Worldwide

Houmal Technology Park
Askarieh Main Road
Houmal, Lebanon
+961 5 941 668

Asia

14F-5/ Rm.5, 14F., No 295
Sec.2, Guangfu Rd. East Dist.,
Hsinchu City 300, Taiwan (R.O.C)
+886 3 5744 591